

TEST REPORT

Reference No:	WTX23X12264041W002
Manufacturer:	Descartes System Group Inc
Address:	105 Trafalgar Street, Floor 2 Floor 2, Nelson, 7010 New Zealand
Product Name:	COREInsight BLE Beacon Tag
Model No:	STD004
Standards:	EN IEC 62311:2020 EN 50665:2017
Date of Receipt sample:	2023-12-12
Date of Test:	2023-12-12 to 2023-12-23
Date of Issue:	2023-12-23
Test Report Form No:	WTX_ EN 50665_2017W
Test Result::	Pass All Market And
reproduced, except in full, without specific stamp of test institute at Address: 1/F., Rock	port refer only to the sample(s) tested, this test report cannot be ut prior written permission of the company. The report would be invalid without and the signatures of approver. Prepared By: Waltek Testing Group (Shenzhen) Co., Ltd. cm 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, c 70 Bao'an District, Shenzhen, Guangdong, China 663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn
Tested by:	Approved by:
hibe. SM/	Silin Chen

Silin Chen

Mike Shi



TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 COMPLIANCE STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 Test Facility	5
2. RF EXPOSURE REFERENCE LEVELS	6
2.1 STANDARD APPLICABLE	6
2.2 APPLICABILITY OF COMPLIANCE ASSESSMENT METHODS	6
2.3 CONFORMITY ASSESSMENT	
EXHIRIT 1 - FUT PHOTOGRAPHS	- 8

MATLERE



Report version

Version No.	Date of issue	Description
Rev.00	2023-12-23	Original
1, 1,	14 14 5th	THE METER MALE WAY I WAY THE



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	COREInsight BLE Beacon Tag
Trade Name:	V was all the left life life
Model No.:	STD004
Adding Model(s):	WE I WAS THE THE THE
Rated Voltage:	Battery:DC3.6V
Battery Capacity:	2700mAh
Power Adaptor Model:	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Software Version:	STD004 V63
Hardware Version:	1.0 A LOT STEP STEP STEP STEP STEP
Note: The test data is gathe	red from a production sample, provided by the manufacturer.

Technical Characteristics of EUT Bluetooth		
Frequency Range:	2402MHz-2480MHz	
Max.RF Output Power:	1 the set with mit was a	
Type of Modulation:	GFSK	
Data Rate:	1Mbps	
Quantity of Channels	40	
Channel Separation:	2MHz	
Type of Antenna:	TE 1 THE WALL WAS THE TOTAL OF THE SECOND	
Antenna Gain:	2dBi	
Note: The Antenna Gain is pro	ovided by the customer and can affect the validity of results.	



1.2 Compliance Standards

The tests were performed according to following standards:

<u>EN 50665:2017</u>: Generic standard for assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0Hz - 300GHz).

EN IEC 62311:2020: Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0Hz to 300GHz)

1.3 Test Methodology

All measurements contained in this report were conducted with EN 50665,

The equipment under test (EUT) was configured to measure its highest possible emission level. For more detail refer to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District,

Shenzhen, Guangdong, China

FCC - Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



2. RF EXPOSURE REFERENCE LEVELS

2.1 Standard Applicable

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies. The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic and electromagnetic fields and induced and contact current.

Normative reference


EN 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0Hz – 300GHz).

2.2 Applicability of compliance assessment methods

EN 62311 Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz–300 GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

Assessment flowchart:



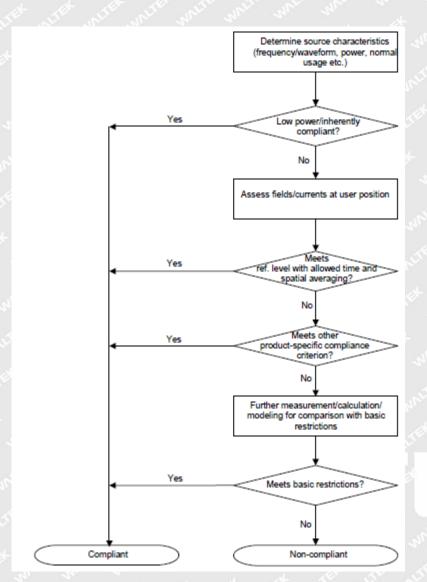

Note: The decision "low power / inherently compliant" shall be based on an assessment where the emissions are specified in a performance standard e.g. a transmitter performance standard and where the output power is limited to a level that cannot exceed the basic restriction. It can also be any other product standard giving the same limitation on the emission level. Some products use a technology or input powers that have the consequence that the emissions cannot exceed the basic restrictions, e.g. non-radio transmitter products like wrist-watches, ADSL modems, computers, telecommunications equipment and hi-fi systems. This shall also be taken into account when the assessment is made.

2.3 Conformity Assessment

Based on the technical characteristics of the products, this low-power equipment includes unintentional (or non-intentional) radiators and does not contain radio transmitters, typical usage, installation and the physical characteristics of equipment make it inherently compliant with the applicable EMF exposure levels.

Page 7 of 8



EXHIBIT 1 - EUT PHOTOGRAPHS

Please refer to "ANNEX".

***** END OF REPORT *****

WATE LIE E