



EMC TEST REPORT

For

Descartes System Group Inc
Inventory control beacon tag

Test Model: BIN001-1

Prepared for : Descartes System Group Inc
Address : 105 Trafalgar Street, Floor 2 Floor 2, Nelson, New Zealand

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 31, 2025
Number of tested samples : 2
Sample No. : A03275107-1, A03275107-2
Serial number : Prototype
Date of Test : March 31, 2025 ~ April 10, 2025
Date of Report : April 11, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**EMC TEST REPORT**

ETSI EN 301 489-1 V2.2.3 (2019-11) & ETSI EN 301 489-17 V3.3.1 (2024-09) & ETSI EN 301 489-3 V2.3.2 (2023-01)

Report Reference No. : LCSA03275107EA

Date Of Issue..... : April 11, 2025

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure.... : Full application of Harmonised standards

Partial application of Harmonised standards

Other standard testing method

Applicant's Name..... : Descartes System Group Inc

Address..... : 105 Trafalgar Street, Floor 2 Floor 2, Nelson, New Zealand

Test Specification

Standard..... : ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
ETSI EN 301 489-17 V3.3.1 (2024-09)

Test Report Form No. : TRF-4-E-132 A/0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2017-06

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Inventory control beacon tag

Trade Mark..... : N/A

Test Model..... : BIN001-1

Ratings..... : DC 3V By CR2477 Button Battery

Result : PASS

Compiled by:

Kevin Huang/Administrator

Supervised by:

Jack Liu/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EMC -- TEST REPORT

Test Report No. : LCSA03275107EA	April 11, 2025 Date of issue
----------------------------------	---------------------------------

Test Model..... : BIN001-1

EUT..... : Inventory control beacon tag

Applicant..... : Descartes System Group Inc

Address..... : 105 Trafalgar Street, Floor 2 Floor 2, Nelson,
New Zealand

Telephone..... : /

Fax..... : /

Manufacturer..... : Descartes System Group Inc

Address..... : 105 Trafalgar Street, Floor 2 Floor 2, Nelson,
New Zealand

Telephone..... : /

Fax..... : /

Factory..... : Descartes System Group Inc

Address..... : 105 Trafalgar Street, Floor 2 Floor 2, Nelson,
New Zealand

Telephone..... : /

Fax..... : /

Test Result

PASS

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	April 11, 2025	Initial Issue	--



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2. OBJECTIVE	7
1.3. RELATED SUBMITTAL(S)/GRANT(S)	7
1.4. TEST METHODOLOGY	7
1.5. DESCRIPTION OF TEST FACILITY	7
1.6. SUPPORT EQUIPMENT LIST	7
1.7. EXTERNAL I/O	7
1.8. MEASUREMENT UNCERTAINTY	8
1.9. DESCRIPTION OF TEST MODES	8
2. SUMMARY OF TEST RESULTS	9
3. TEST RESULTS	10
3.1. LINE CONDUCTED EMISSION	10
3.2. CONDUCTED EMISSION (WIRED NETWORK PORT)	12
3.3. RADIATED DISTURBANCE	13
3.4. RF ELECTROMAGNETIC FIELD (80 MHz - 6000 MHz)	16
3.5. ELECTROSTATIC DISCHARGE	18
4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST	20
4.1. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTER (CT)	20
4.2. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTER (TT)	20
4.3. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVER (CR)	20
4.4. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVER (TR)	20
5. LIST OF MEASURING EQUIPMENT	22
6. PHOTOGRAPHS OF TEST SETUP	23
7. PHOTOGRAPHS OF THE EUT	23



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT : Inventory control beacon tag
Test Model : BIN001-1
Ratings : DC 3V By CR2477 Button Battery
Hardware Version : BIN001-1
Software Version : /
Bluetooth :
Frequency Range : 2402MHz~2480MHz
Channel Number : 40 channels for Bluetooth V5.0 (BT LE/BT 2LE)
Channel Spacing : 2MHz for Bluetooth V5.0 (BT LE/BT 2LE)
Modulation Type : GFSK for Bluetooth V5.0 (BT LE/BT 2LE)
Bluetooth Version : V5.0
Antenna Description : Internal Antenna , 3.2dBi(Max)
NFC :
Frequency Range : 13.56MHz
Modulation Type : ASK
Antenna Description : PCB Antenna, 0dBi(Max.)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.2. Objective

ETSI EN 301 489-1	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-3	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-17	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband and Wideband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility

The objective is to determine compliance with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-3 V2.3.2 (2023-01), ETSI EN 301 489-17 V3.3.1 (2024-09).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-3 V2.3.2 (2023-01), ETSI EN 301 489-17 V3.3.1 (2024-09).

1.5. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.7. External I/O

I/O Port Description	Quantity	Cable
--	--	--



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





1.8. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	0.01ppm	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

1.9. Description of Test Modes

There was 3 test Modes TM1 to TM3 were shown below:

TM1 : Operate in Bluetooth Mode

TM2 : Operate in NFC Mode

TM3 : Idle Mode

***Note:

1. All test modes were tested, but we only recorded the worst case in this report.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clause 8.4 of ETSI EN 301 489-1 Conducted Emission (AC mains input/output port)	N/A*
§7.1	Reference to clause 8.3 of ETSI EN 301 489-1 Conducted Emission (DC power input/output port)	N/A*
§7.1	Reference to clause 8.7 of ETSI EN 301 489-1 Conducted Emission (Wired network port)	N/A*
§7.1	Reference to clause 8.2 of ETSI EN 301 489-1 Radiated Emission (Enclosure of ancillary equipment)	Compliant
§7.1	Reference to clause 8.5 of ETSI EN 301 489-1 Harmonic current emissions (AC mains input port)	N/A*
§7.1	Reference to clause 8.6 of ETSI EN 301 489-1 Voltage fluctuations and flicker (AC mains input port)	N/A*
§7.2	Reference to clause 9.3 of ETSI EN 301 489-1 Electrostatic discharge (Enclosure port) (EN 61000-4-2)	Compliant
§7.2	Reference to clause 9.2 of ETSI EN 301 489-1 RF electromagnetic field (80MHz to 6000MHz) (Enclosure port) (EN 61000-4-3)	Compliant
§7.2	Reference to clause 9.4 of ETSI EN 301 489-1 Fast transients common mode (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-4)	N/A*
§7.2	Reference to clause 9.8 of ETSI EN 301 489-1 Surges, line to line and line to ground (AC mains power input ports, wired network ports) (EN 61000-4-5)	N/A*
§7.2	Reference to clause 9.5 of ETSI EN 301 489-1 RF common mode 0.15MHz to 80MHz (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-6)	N/A*
§7.2	Reference to clause 9.6 of ETSI EN 301 489-1 Transients and surges in the vehicular environment (ISO 7637-2)	N/A*
§7.2	Reference to clause 9.7 of ETSI EN 301 489-1 Voltage dips and interruptions (AC mains power input ports) (EN 61000-4-11)	N/A*



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3. TEST RESULTS

3.1. Line Conducted Emission


3.1.1 Conducted Emission Limit

Relevant Standard(s): ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020
Class B

Limits for Line Conducted Emission		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.2 Test Configuration

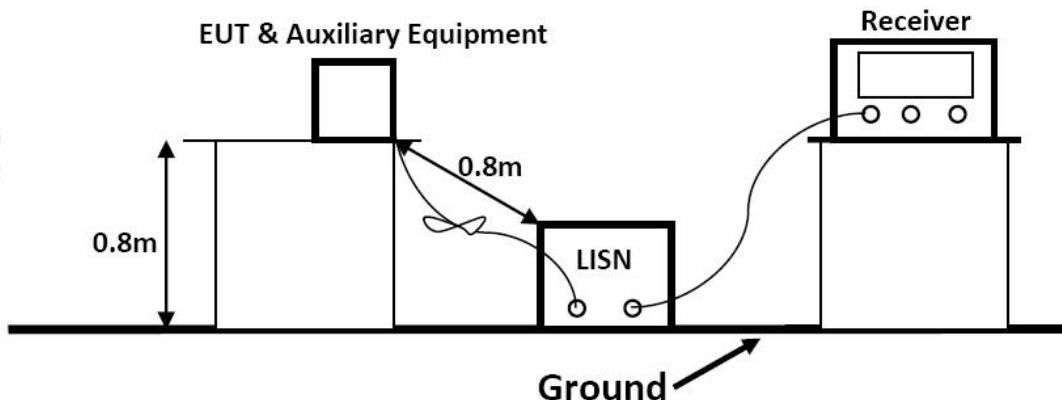

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The EUT received charging power from the charger which received power through a LISN supplying power of AC 230V/50Hz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.1.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

3.1.4 Test Procedure

Power on the EUT, the EUT begins to work. Make sure the EUT operates normally during the test.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

3.1.5 Test Results

Not applicable.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


3.2. Conducted Emission (Wired Network Port)

3.2.1 Conducted Emission Limit(Wired Network Port)

Frequency (MHz)	Class B voltage limits (dB μ V)		Class B current limits (dB μ A)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	84.0~74.0	74.0~64.0	40.0~30.0	30.0~20.0
0.50 ~ 30.00	74.0	64.0	30.0	20.0

NOTE 1-The limits decrease linearly with the logarithm of the frequency in the range 0,15 MHz to 0,5 MHz.
NOTE 2-The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / I = 44$ dB).

3.2.2 Test Configuration

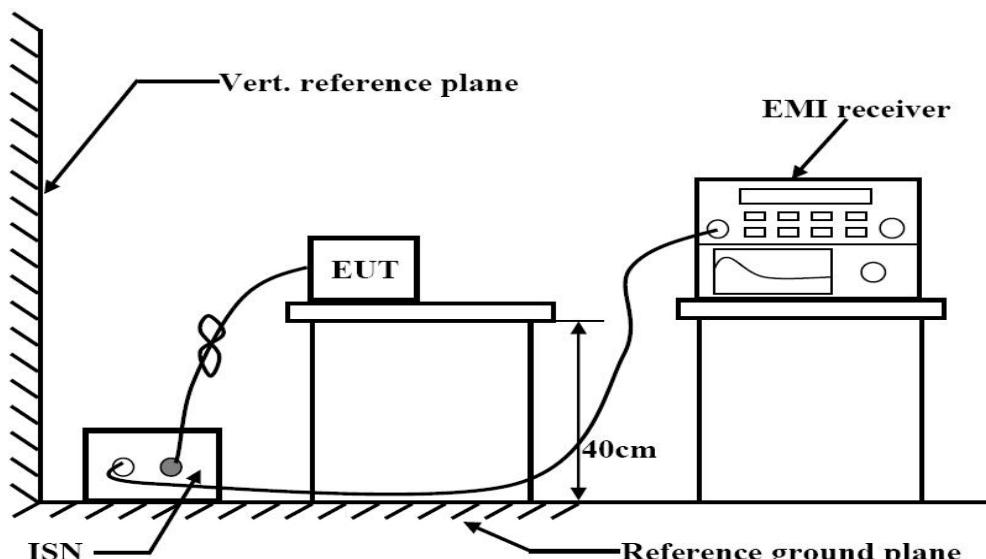

3.2.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

3.2.4 Test Procedure

Please refer to ETSI EN 301 489-1 Clause 8.7.2 and EN 55032 Clause 6 for the measurement methods.

3.2.5 Test Results

Not applicable.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3.3. Radiated Disturbance

3.3.1 Radiated Emission Limit

Relevant Standard(s): ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020
Class B

Limits for Radiated Disturbance Below 1GHz			
Frequency (MHz)	Facility	Distance (Meters)	Field Strengths Limit (dB μ V/m)
30 ~ 230	FAR	3	42-35
230 ~ 1000	FAR	3	42

***Note:

- (1) The smaller limit shall apply at the combination point between two frequency bands.
- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

Limits for Radiated Disturbance Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54

***Note: The lower limit applies at the transition frequency.


Limits for Radiated Disturbance Below 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Class B Limit (dB μ V/m)	
		Fundamental	Harmonics
30 ~ 230	3	60	52
230 ~ 300	3		52
300 ~ 1000	3		56

***Note: These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the LO.

Signals at all other frequencies shall be compliant with the limits given in above Table.

Limits for Radiated Disturbance Above 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54

***Note: The lower limit applies at the transition frequency.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3.3.2 Test Configuration

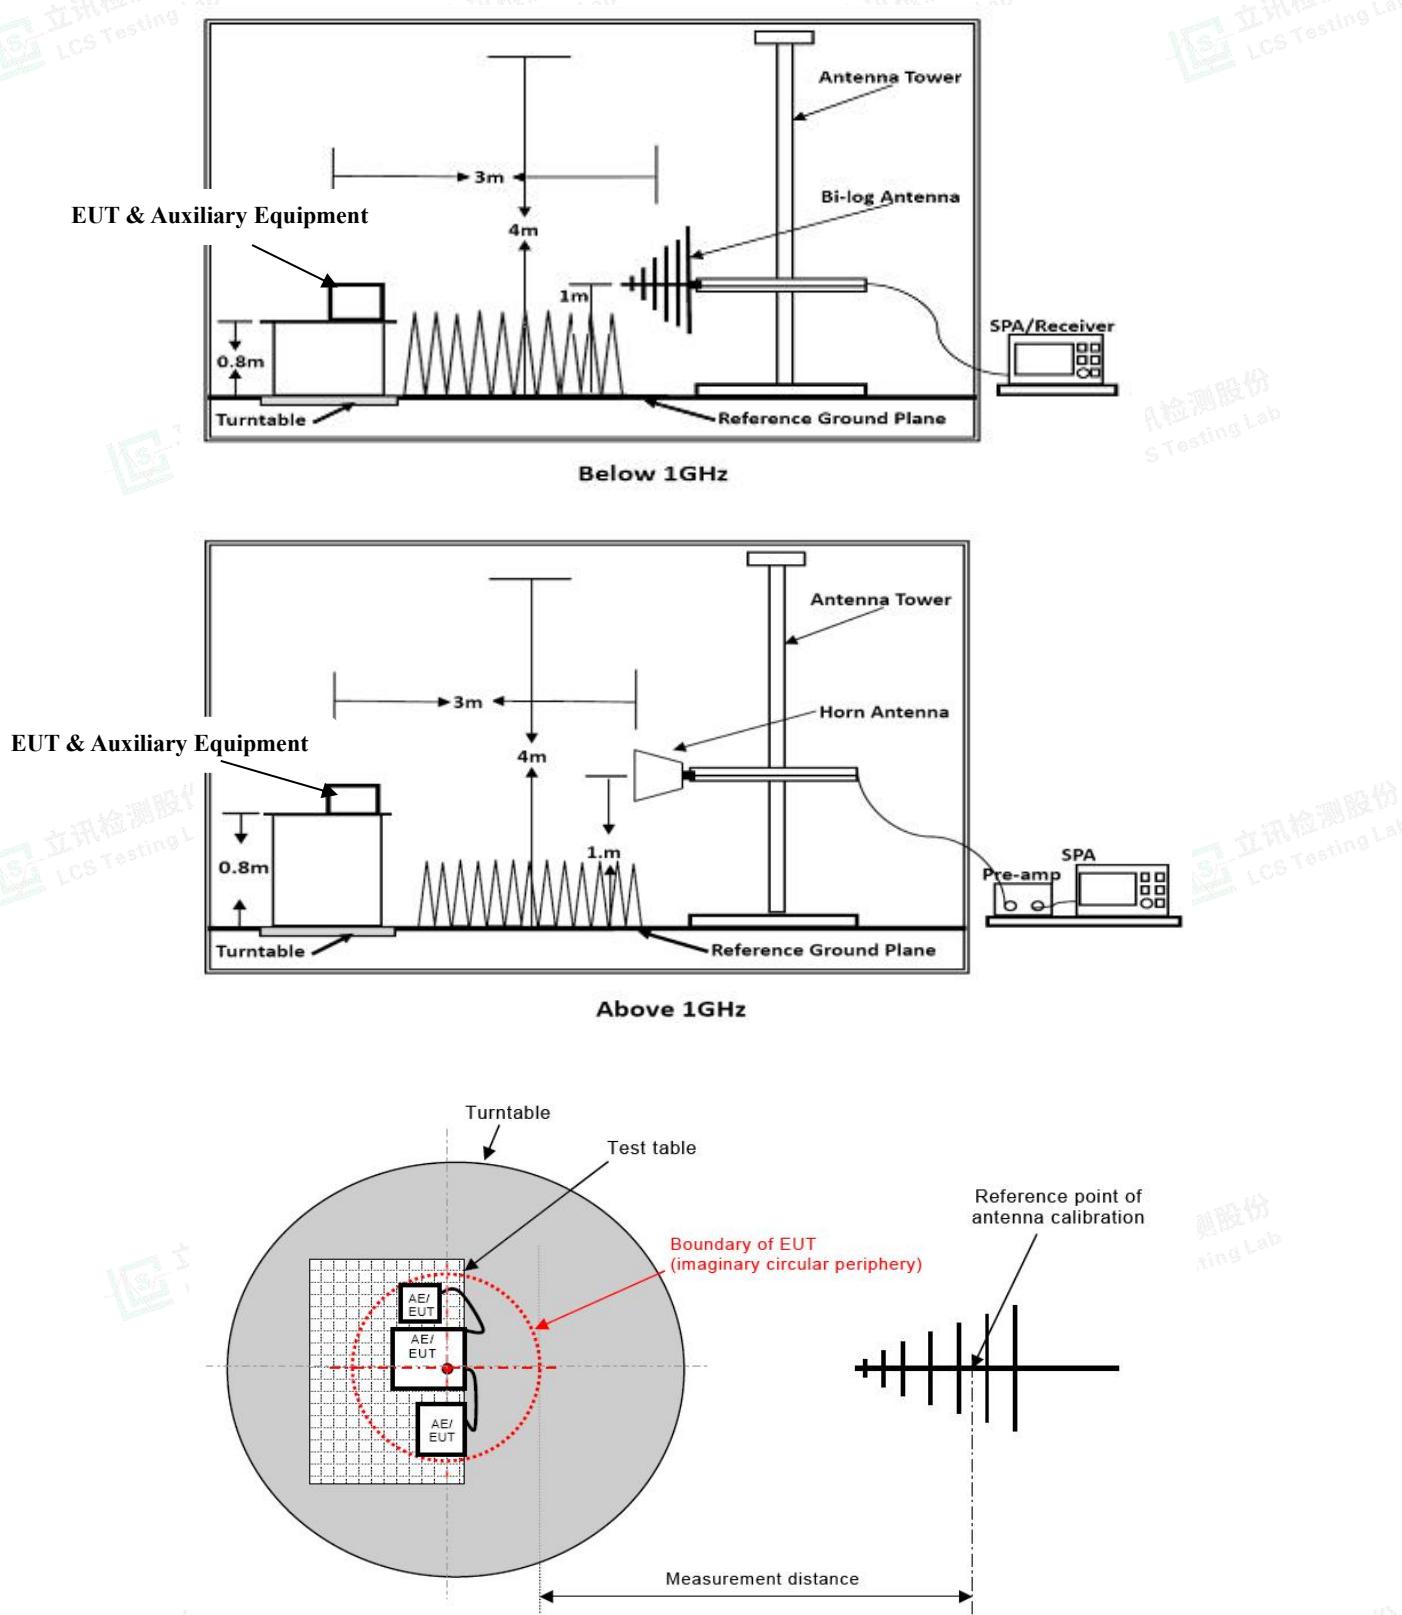

**Figure C.1 – Measurement distance
Test Setup for FM Receiver**



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

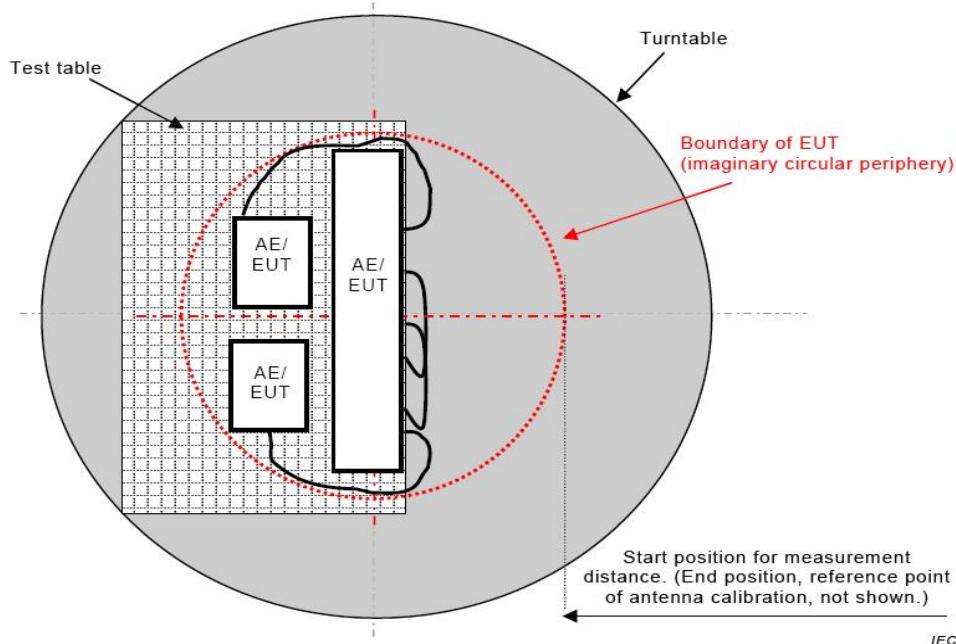


Figure C.2 – Boundary of EUT, Local AE and associated cabling

Test Setup for FM Receiver

3.3.3 Test Procedure

The test method shall be in accordance with CENELEC EN 55032 [1], annex A.1

3.3.4 Test Results

PASS


The worst test mode of the EUT was TM1, and its test data please refer to Appendix A.1 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

3.4. RF Electromagnetic Field (80 MHz - 6000 MHz)

3.4.1 Test Configuration

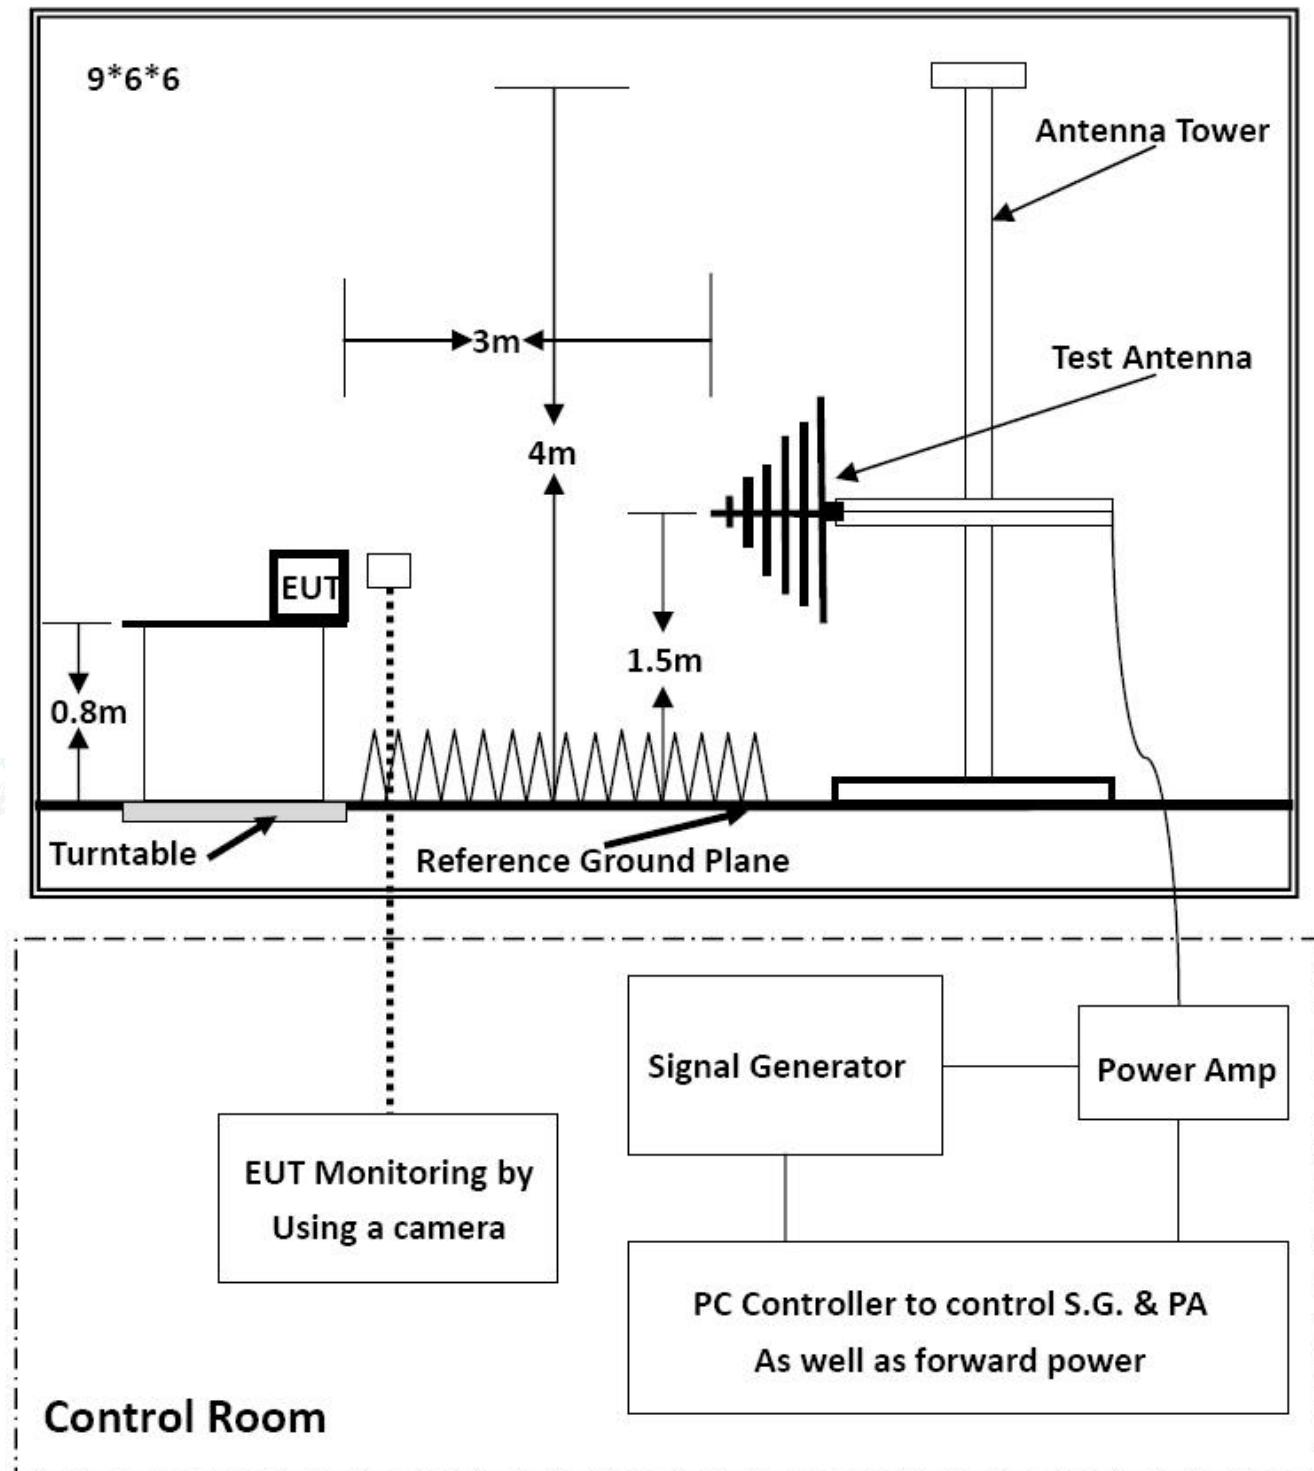

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3.4.2 Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-3, ETSI EN 301 489-17 (EN 61000-4-3: 2006+A2: 2010)

Test level 2 at 3V/m.

3.4.3 Severity Level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special
Performance Criterion: A	

3.4.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Scanning Frequency	80-6000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

3.4.5 Test Results

PASS

Please refer to Appendix A.2 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3.5. Electrostatic Discharge

3.5.1 Test Configuration

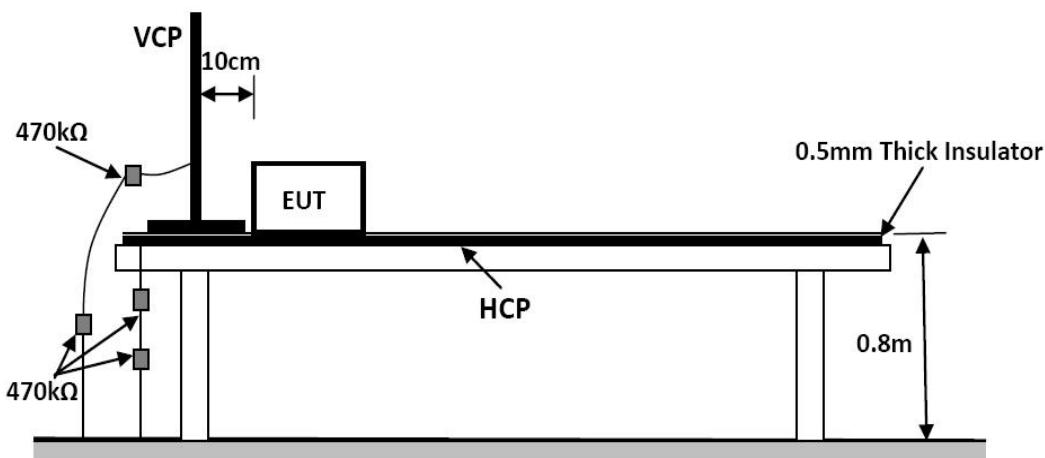

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

3.5.2 Test Procedure

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-2: 2009

Test level 3 for Air Discharge at ± 8 kV

Test level 2 for Contact Discharge at ± 4 kV

3.5.2.1 Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

3.5.2.2 Contact Discharge

All the procedure shall be same as Section 3.5.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

3.5.2.3 Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3.5.2.4 Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

3.5.3 Test Results

PASS

Please refer to Appendix A.3 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

4.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

4.2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

4.3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

4.4. Performance criteria for Transient phenomena applied to Receiver (TR)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Performance criteria for ETSI EN 301 489-3 V2.3.2 (2023-01)

1) Introduction

The performance criteria are used to make an assessment whether a radio equipment passes or fails immunity tests.

Only the performance criteria specified in the present document or in ETSI EN 301 489-1 [1] where referenced shall apply.

The provisions of ETSI EN 301 489-1 [1] clause 6 shall apply, together with clauses 6.2 and 6.3 of the present document.

2) Continuous and non-continuous operation

Latency is the time delay between the initiation and the completion of operation of the EUT. Correct functioning requires completing the relevant operation within the maximum latency time.

Where the maximum latency is specified in the applicable harmonised radio standard (in the wanted performance criterion, or an acknowledge requirement), that value shall be used.

Where this is not the case, then the maximum latency is that required by the intended use of the EUT.

3) Operating modes

Where the EUT has more than one mode of operation (see clause 4.4.1), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in all modes to confirm there are no such unintentional responses.

Performance criteria for ETSI EN 301 489-17 V3.3.1 (2024-09)

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.
NOTE: Operate as intended during the test shall be considered as:		<ul style="list-style-type: none">• For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.• For equipment that does not support a PER or a FER, (e.g. audio equipment and equipment transmitting sporadic messages) the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5. LIST OF MEASURING EQUIPMENT

RADIATED DISTURBANCE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	N/A	N/A
2	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
3	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
6	EMI Test Receiver	R&S	ESPI	101940	2024-06-06	2025-06-05
7	Low-frequency amplifier	SchwarzBECK	BBV9745	00253	2024-10-08	2025-10-07
8	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2024-10-08	2025-10-07
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2024-10-08	2025-10-07
10	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2024-06-06	2025-06-05
11	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-06-06	2025-06-05

RF ELECTROMAGNETIC FIELD

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	RS Test Software	Tonscend	/	/	N/A	N/A
2	MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2024-10-08	2025-10-07
3	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
4	RF POWER AMPLIFIER	OPHIR	5225R	1052	2024-06-06	2025-06-05
5	RF POWER AMPLIFIER	OPHIR	5273F	1019	2024-06-06	2025-06-05
6	RF POWER AMPLIFIER	SKET	HAP_0306G -50W	/	2024-06-06	2025-06-05
7	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2023-07-14	2026-07-13
8	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-482	2024-07-20	2027-07-19
9	RS Electric field probe	narda	EP601	611WX80208	2024-06-25	2025-06-24
10	Sound Level meter	BK Precision	735	735008731001002 0	2024-06-06	2025-06-05
11	Audio Analyzer	R&S	UPV	1146.2003K02-10 1721-UW	2024-10-08	2025-10-07
12	Mouse Simulation	Brüel & Kjaer	4227	A0304216	2024-06-06	2025-06-05
13	Ear Simulation and supply	Brüel & Kjaer	2669.4182.5 935	A0305284	2024-06-06	2025-06-05
14	Acoustical Calibrators	Brüel & Kjaer	4231	A0304215	2024-06-06	2025-06-05
15	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-06-06	2025-06-05

ELECTROSTATIC DISCHARGE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	SCHLODER	SESD 230	604035	2024-07-15	2025-07-14
2	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-06-06	2025-06-05

Note: N/A means no calibration requirement



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,

Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix B for Photographs of Test Setup_EMC

7. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity